

Cliente / Cliente: 65th Air Base Wing, United States Air Force

Contracto / Contract N^o: FA448618F0032

Número de Projeto / Project Number: MQNA 18-1502

Repair Internal Fences

Lajes Field, Terceira Island, Azores

Descrição de Projecto

- Remover e descartar vedação enferrujada / danificada, postes, arame farpado e dois (2) portões de metal, um (1) simples e um (1) duplo, incluindo as fundações de betão. Remover e descartar a caixa telefônica externa e todos os cabos e condutas associados. Remover e descarte as placas de metal (3).
- Instalar novas vedações Betafence Securifor 2D. Os postes devem ser Betafence Bekasecure "omega", devem incluir Bent Anns, placas de base e placas de cobertura para os cantos. Os portões devem ser Securifor Betafence, com estrutura em tubo quadrado com 60x60mm para os portões simples e 80x60mm para os duplos, devem incluir a faixa de conexão da vedação e ter 2.400 mm. Instalar o sistema completo de arame farpado (braços dobrados, arame farpado, tipo Motto, Zincalu. Instalar novos avisos de metal.

Project Description

- *Remove and dispose rusted/damage fence, poles, barb wire and two (2) metal gates, one (1) single, and one (1) double, including the concrete foundations. Remove and dispose exterior phone box and all associate cables and conducts. Remove and dispose tree (3) metal warning plates.*
- *Install new Betafence Securifor 2D fences. Poles should be Betafence Bekasecure "omega", must include Bent Anns, Base Plates and Cover Plates for the corners. Gates must be Betafence Securifor Gates, with frame out of square tube with 60x60mm for the single gates and 80x60mm for the double, must include the fence connection strip, and must be 2400mm. Install complete system of barb wire (bent arms, barbed wire, type Motto, Zincalu.install new metal warnings.*



Figura 1 – Descrição
Figure 1 - Description

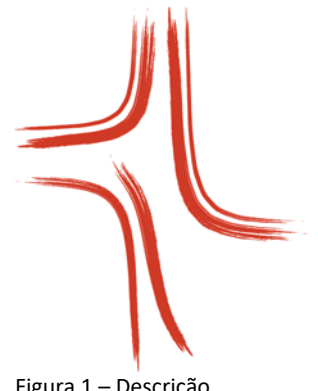


Figura 1 – Descrição
Figure 1 - Description



Figura 1 – Descrição
Figure 1 - Description



Figura 1 – Descrição
Figure 1 - Description

Período de Construção / Construction Period: Abril 2018 a Abril 2019 / April 2018 to April 2019